


# Powering the Future of Automotive Innovation

## In-Vehicle USB-C Charger

- PD 100W dual port, 12Vin
- Total max. charging power: 100W
  - » Single Port (C1 or C2) = 100W (20V/5A)
  - » Dual Port (C1+C2) = 50W (20V/2.5A) + 50W (20V/2.5A)
- Support charging + data transmission + video streaming
- Dimension = 85.2mm x 50.4mm x 21.0mm

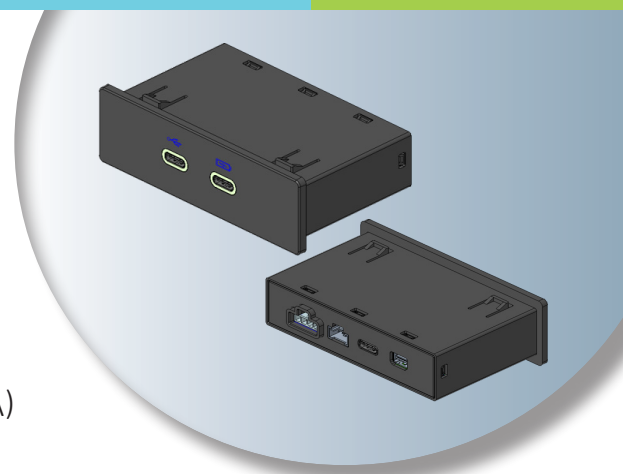

| System                                   |                 |
|------------------------------------------|-----------------|
| Operating Temperature with charging (°C) | -40 ~ 85        |
| USB PD Spec                              | PD 3.2          |
| USB Spec                                 | USB 3.2 Gen 1x1 |
| Display Port                             | 1.4             |
| Weight (g)                               | < 90            |

| Input Specs                 |              |
|-----------------------------|--------------|
| Input Voltage (V)           | 9 ~ 16       |
| Standby Power (W)           | 0.19         |
| Input Operating Current (A) | 9.6          |
| Output Specs                |              |
| Output Voltage (V)          | 5, 9, 15, 20 |
| Charging Efficiency (%)     | 95           |



**Delta Electronics (Americas)  
Automotive**

47659 Halyard Dr.  
Plymouth MI, 48170

Contact Us